



bajaj Metal Exhaust



HEAVY DUTY EXHAUST FANS




Dimensional Specifications

Size	A MM	B MM	ØC MM	ØD MM	E MM	F MM	G MM	ØE MM
030	385	317	327	9.5	300	125	255	300
038	470	375	405	9.5	310	127	285	380
045	570	450	482	10.5	360	162	345	450
048	570	450	482	10.5	360	162	360	475
060	720	598.5	635	11.5	405	162	385	600

*Check availability before quoting

With Frame

Without Frame

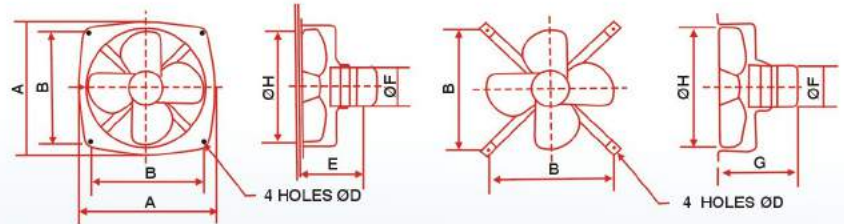

Special Features

- Totally enclosed highly efficient heavy duty motor with pressure die cast aluminium rotor mounted on two ball bearings.
- Aerodynamically contoured blades handle maximum air with minimum power consumption.
- Rigid frame with rubber mountings for silent operation.
- Epoxy powder coated with specially pre-treated component to enhance corrosion resistance for longer shelf life.
- Generally conforming to IS 2312-987

Performance Guide

size	Impeller Dia (mm)	Rated Supply	Speed (RPM)	Current (AMP)	Power Input (Watts)	Free Delivery (M3/Hr.)	Noise Level dBA
025	225	230V, 50 Hz, 1Ø	1400	0.25	50	1250	50
030	300	230V, 50 Hz, 1Ø	1400	0.44	90	1900	56
030	300	230V, 50 Hz, 1Ø	950	0.26	55	1250	54
038	380	230V, 50 Hz, 1Ø	1400	0.72	150	4000	63
038	380	230V, 50 Hz, 1Ø	950	0.48	100	2300	56
045	450	230V, 50 Hz, 1Ø	1400	1.98	410	6200	65
045	450	230V, 50 Hz, 1Ø	950	0.70	145	4340	63
048	475	230V, 50 Hz, 1Ø	1400	2.08	430	7300	67
048	475	230V, 50 Hz, 1Ø	950	0.78	160	4800	65
060	600	230V, 50 Hz, 1Ø	950	2.66	550	10400	63
060	600	230V, 50 Hz, 1Ø	700	1.24	255	8150	61
030	300	415V, 50 Hz, 3Ø	1400	0.20	90	-	56
030	300	415V, 50 Hz, 3Ø	950	0.12	55	1250	54
038	380	415V, 50 Hz, 3Ø	1400	0.30	150	4000	63
038	380	415V, 50 Hz, 3Ø	950	0.24	100	2300	56
045	450	415V, 50 Hz, 3Ø	1400	0.96	410	6200	65
045	450	415V, 50 Hz, 3Ø	950	0.34	145	4340	63
048	475	415V, 50 Hz, 3Ø	1400	1.00	430	7300	67
048	475	415V, 50 Hz, 3Ø	950	0.37	160	4800	65
060	600	415V, 50 Hz, 3Ø	950	1.28	550	10400	63
060	600	415V, 50 Hz, 3Ø	700	0.56	255	8150	61

*Due to continuous efforts for improvement, the specifications are subject to change without prior notice.